

● Communication Board

- Built-in touch screen
- Very low power consumption
- High performance i.MX 7Dual processor
- No power needed to maintain display image



- 42" E Ink B/W panel
- Size 918.8 x 704.6 x 30.4 mm
- Weight 7.5Kgs
- Display area 856.8 x 642.6 mm
- Resolution 2880 x 2160
- 1 x micro SD card slot
- Onboard eMMC 8GB
- Optional with M.2 module
- 1 x RJ-45 supports 10/100/1000 Base-T
- Front IP65
- Power supply
DC in +12V

● Room Info Display

- Cord-free door sign
- Status updates for each room
- High resolution graphic
- Ultra low power consumption
- Anti-theft design
- Easy Maintenance



- 7.8" E Ink B/W panel
- Size 200 x 138 x 18 mm
- Weight 43g
- Display area 158 x 118 mm
- Resolution 1872 x 1404
- 2.4GHz WiFi 802.11 b/g/n
- Power supply
AAA Alkaline Batteries x 6
Support External USB Power


● Bedside Card

- Patient info
- Instant status
- Multiple pages
- Mobility with bed
- Green technology



- 5.65" E Ink B/W/R panel
- Size 159 x 113 x 15 mm
- Weight 70g
- Display area 114.9 x 85.8 mm
- Resolution 600 x 448
- 3 buttons for page up/confirm/page down
- Front IP65
- Operating frequency: 915MHz
- Power supply
AAAA alkaline batteries x 4

5.65" Bedside Card Information System Infrastructure

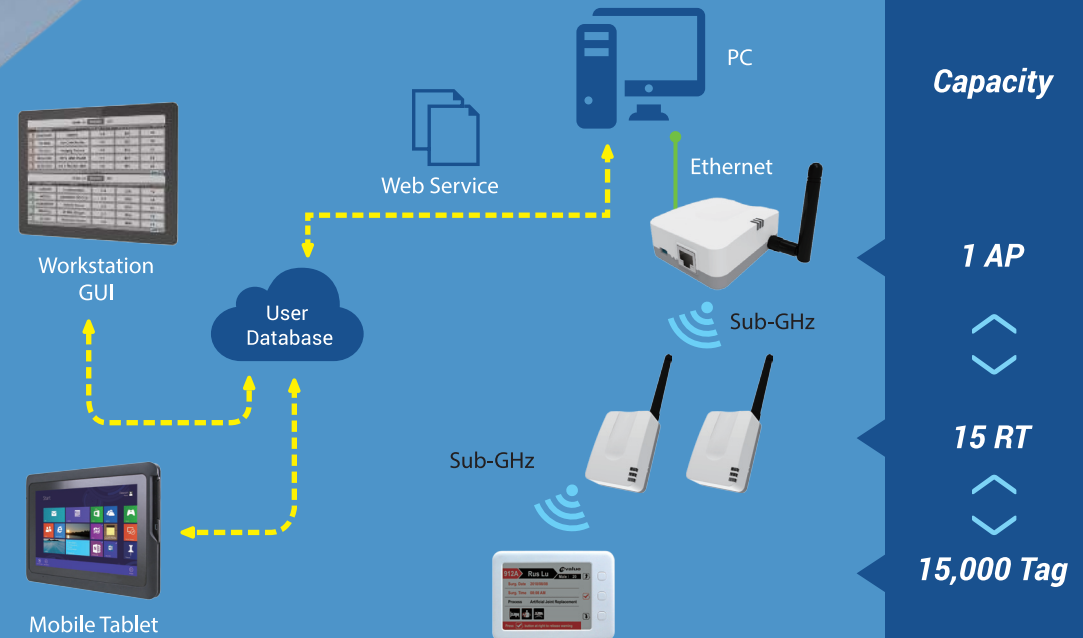

Sub-GHz Access Point & Router

AP



- Bridging between TCP/IP and Sub-GHz network
- Compact size (smallest footprint)
78 x 68 x 30.3mm (L x W x H)
- Weight: 84g
- 5VDC-powered (mini USB)
- Manage 15 routers

RT



- Forwarding data to tag
- Flexible network expansion
- Double wireless coverage
- Solving dead zone issue
- Compact size
68.5 x 49 x 33mm (L x W x H)
- Weight: 60g
- 5VDC-powered (mini USB)
- Manage 1000 tags